

Portable Spot Cooler - Air Cooled

| MODEL: PAC | 1211 | 1811 | 2412 | 3612 | 3632 | 3634 | 6012 | 6032 | 6034 |
|--|---|--------|-----------|-----------|-----------|---------|------------------------------|-----------|---------|
| Cooling Capacity ² | 11,800 | 16,800 | 24,020 | 36,050 | 36,050 | 36,050 | 60,050 | 60,050 | 60,050 |
| Voltage (V/Phase) at 60Hz ¹ | 115/1 | | 208-230/1 | 208-230/1 | 208-230/3 | 460/3 | 208-230/1 | 208-230/3 | 460/3 |
| Amps ⁶ | 10.4 | 14.1 | 14.9 | 18.1 | 17.2 | 8.7 | 32.0 | 20.4 | 14.8 |
| Watts ⁶ | 1180 | 1670 | 2700 | 3620 | 3620 | 3620 | 6000 | 6000 | 6000 |
| In Rush Current (Amps) | 60 | 75 | 68 | 113 | 93 | 60 | 178 | 162 | 87 |
| Plug Type | 5-15P | 5-20P | 6-20P | 6-30P | L15-30P | L16-20P | 6-50P | L15-30P | L16-20P |
| EER ⁴ | 10.0 | 10.0 | 8.9 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 | 10.0 |
| Compressor HP | 1 | 1 1/2 | 2 | 3 | 3 | 3 | 5 | 5 | 5 |
| Compressor RLA | 9.5 | 12.3 | 10.5 | 13.6 | 8.8 | 5.0 | 27.6 | 18.1 | 9.0 |
| Compressor LRA | 50 | 63 | 48 | 83 | 77 | 35 | 158 | 137 | 62 |
| Evap CFM ³ | 400 | 600 | 810 | 1200 | 1200 | 1200 | 1950 | 1950 | 1950 |
| Evap Motor HP | 1/8 | 1/8 | 1/3 | 1/3 | 1/3 | 1/3 | 1 | 1 | 1 |
| Evap Motor Watts | 180 | 210 | 330 | 375 | 375 | 375 | 550 | 550 | 550 |
| Condenser CFM ³ | 580 | 930 | 1010 | 1390 | 1390 | 1390 | 2200 | 2200 | 2200 |
| Condenser Motor HP | 1/8 | 1/8 | 1/3 | 1 | 1 | 1 | 1 | 1 | 1 |
| Condenser Motor Watts | 200 | 280 | 350 | 460 | 460 | 460 | 750 | 750 | 750 |
| Condensate | 5 Gallon Condensate Tank - STANDARD (Pump Optional) | | | | | | Pump -STANDARD (20 ft. Lift) | | |
| Sound Level ⁵ | 54 | 60 | 65 | | | | 69 | 78 | |
| R-410A Charge Oz. | 18 | 40 | 37 | | | | 66 | 80 | |
| (A) Height with Casters (in.) | 36 1/2 | 45 1/2 | | | | | 50-1/4 | 51-1/2 | |
| (B) Width (in.) | 20 | 23 | | 27-1/2 | | | | | |
| (C) Depth (in.) | 25 | 30 | | | | | 35 | 39-1/2 | |
| (D) Height w/o Casters (in.) | 32 1/2 | 40 1/2 | | | | | 45 | 45-1/2 | |
| Net Weight (lb.) | 180 | 260 | 260 | 365 | | 380 | 485 | 485 | 515 |
| Shipping Weight (lb.) | 200 | 285 | 285 | 405 | | 420 | 525 | 525 | 555 |
| Shipping Volume (cu. ft.) | 19 | 28 | | 40 | | | 48 | | |



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


NOTES

1. Dedicated Circuit and Time Delay fuse or circuit breaker are recommended
2. Cooling Capacity is total BTUH at 80°DB/67° WB return air, 95° DB Condenser Air
3. CFM with free discharge
4. Cooling EER is determined at high fan speed, with condenser air ducted into another area
5. Sound Pressure, dB at 5 feet, commercial operation
6. Amps & Watts at 208 Volts (208-230 V Models)

COOLING AMBIENT*

OPERATING RANGE 65° TO 105°

* May COOL down to 55° if equipped with hot gas bypass (factory installed)

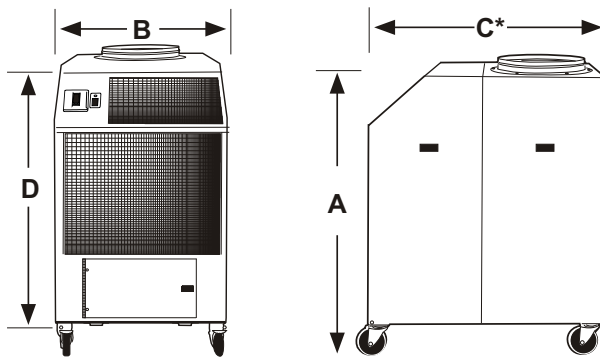

NOT APPROVED FOR OUTDOOR USE

WARRANTY

ALL OCEANAIRE PRODUCTS ARE COVERED BY THE OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT

PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)

*** CONDENSER PLENUM ALLOWANCES**

For Size 12, 18 and 24 Models, add 13 inches to Dim C
 For Size 36 and 60 Models, add 17 inches to Dim C



AIR COOLED

OCEANAIRE

ACCESSORIES

NOZZLE KIT

2NK-1 (2 X 4-INCH NOZZLES)
 2NK-2 (2 X 6-INCH NOZZLES)
 2NK-3 (2 X 8-INCH NOZZLES)

MODELS

PAC12
 PAC18, 24
 PAC36, 60

EVAPORATOR RETURN AIR PLENUM KIT

DEP-10 (10-INCH) PAC12
 2DEP-12 (12-INCH) PAC18, 24
 DEP-16 (16-INCH) PAC36, 60

CEILING PANEL KIT

CK-12 (12-INCH) PAC12, 28, 24
 CK-16 (16-INCH) PAC36, 60
 CK-12PL CK-12 WITHOUT DUCT FLANGE

DISCHARGE DUCT ADAPTER

2DDA-6 (6-INCH) PAC12
 2DDA-10 (10-INCH) PAC18, 24
 2DDA-16 (16-INCH) PAC36, 60

CONDENSATE PUMP KIT

PC-1P 115V PUMP KIT, DELUXE PAC12, 18
 PC-2P 230V PUMP KIT, DELUXE PAC24, 36
 (PAC60 MODELS COME WITH PUMPS INSTALLED)

CONDENSER RETURN AIR PLENUM


2DCP-1 (12-INCH) PAC12
 2DCP-2 (12-INCH) PAC18, 24
 DCP-5 (16-INCH) PAC36, 60

CEILING PANELS (PANEL WITH DUCT CONNECTOR)

CKP-12 2 X 2 CEILING PANEL, FOR 12-INCH DUCT
 CKP-16 2 X 2 CEILING PANEL, FOR 16-INCH DUCT

DUCT FLANGE (SEE NOTE BELOW)

DF-12 12-INCH DUCT FLANGE

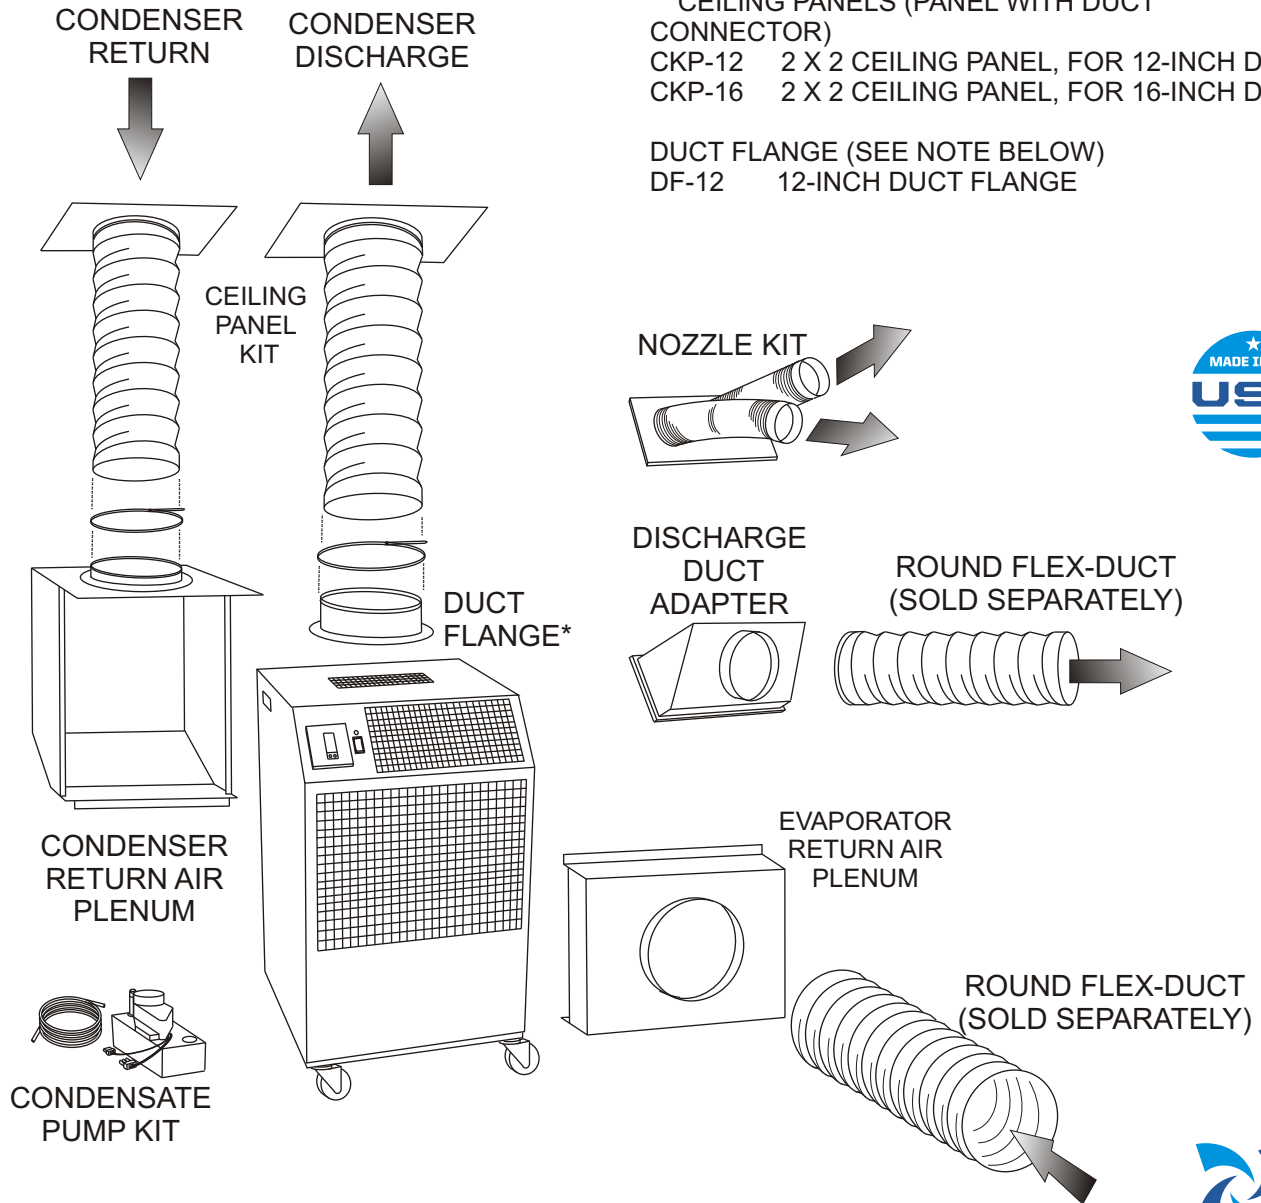

NOTE: PAC36 AND PAC60 COME WITH 16-INCH FLANGES



AIR COOLED

OCEANAIRE 6228 Oakton Street Morton Grove, IL 60053

P 847.583.0311 F 847.583.0312 E sales@oceanaire-inc.com W www.oceanaire-inc.com



OA-TS-PAC-030115