



877-823-2722

20AC

TECHNICAL SPECIFICATIONS

DELUXE PORTABLE SPOT COOLER – AIR COOLED

MODEL: 20AC	1211	1811	2412	3612	3632	3634	6012	6032	6034			
COOLING CAPACITY	11,800	16,800	24,020	36,050			60,100					
VOLTAGE (V/Phase) at 60Hz	115/1		208-230/1		208-230/3		460/3	208-230/1		208-230/3		460/3
AMPS	10.4	14.1	14.9	19.6	17.2	8.7	32.0	20.4	14.8			
TOTAL WATTS	1180	1670	2700	3620			6000					
IN-RUSH CURRENT (AMPS)	60	75	68	113	93	60	178	162	87			
PLUG TYPE	5-15P	5-20P	6-20P	6-30P	L15-30P	L16-20P	6-50P	L15-30P	L16-20P			
EER	10.0		8.9	10.0								
COMPRESSOR HP	1	1 1/2	2	3			5					
COMPRESSOR RLA	9.5	12.3	10.5	13.6	8.8	5.0	27.6	18.1	9.0			
COMPRESSOR LRA	50	63	48	83	77	35	158	137	62			
EVAP CFM	400	600	810	1200			1950					
EVAP MOTOR HP	1/8		1/3			1						
CONDENSER CFM	580	930	1010	1390			2200					
COND MOTOR HP	1/8		1/3	1								
CONDENSATE	5 Gallon Condensate Tank - STANDARD (Pump Optional)						Pump - STANDARD (20 ft. Lift)					
R-410A CHARGE (oz.)	18	40	37	66			80					
(A) HEIGHT (in.)	37-3/4		45-3/4		50-1/4			51-3/4				
(B) WIDTH (in.)	20	24		27-1/2								
(C) DEPTH (in.)	25		30			35			39-1/2			
NET WEIGHT (lb.)	180	260		365		400	485	520				

20ACSPES010119



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


- OA Cooling Capacity is total BTUH at 80°DB/67°WB return air, 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into another area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS WITH BRAKES
- OA CONDENSATE ALERT
- OA LCDI POWER CORD (SOME MODELS)
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

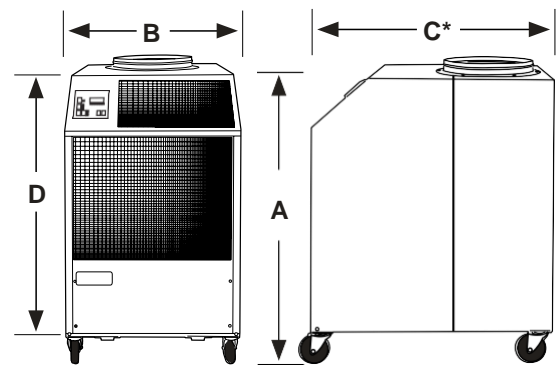

* Condenser Return Air Plenums



WARRANTY

OCEANAIRE LIMITED WARRANTY

1 YEAR ON THE FULL PRODUCT PLUS, 4 ADDITIONAL YEARS FOR THE COMPRESSOR (RESTRICTIONS APPLY)



877-823-2722

20AC – DELUXE PORTABLE SPOT COOLER

ACCESSORIES

NOZZLE KIT

2NK-1	2 X 4-INCH NOZZLES	size 12
2NK-2	2 X 6-INCH NOZZLES	size 18, 24
2NK-3	2 X 8-INCH NOZZLES	size 36, 60

CEILING PANEL KIT

CK-12	12-INCH	size 12, 18, 24
CK-16	16-INCH	size 36, 60
CK-12PL	CK-12 WITHOUT DUCT FLANGE	

CONDENSATE PUMP KIT

PC-1P	115V PUMP KIT	size 12, 18
PC-2P	230V PUMP KIT	size 24, 36
2DPC-1	115V PUMP KIT, DELUXE	size 12, 18
2DPC-2	230V PUMP KIT, DELUXE	size 24, 36

(size 60 models come with pump installed)

EVAPORATOR RETURN AIR PLENUM KIT

DEP-10	10-INCH	size 12
2DEP-12	12-INCH	size 18, 24
DEP-16	16-INCH	size 36, 60

DISCHARGE DUCT ADAPTER

2DDA-6	6-INCH	size 12
2DDA-10	10-INCH	size 18, 24
2DDA-16	16-INCH	size 36, 60

CONDENSER RETURN AIR PLENUM

2DCP-1	12-INCH	size 12
2DCP-2	12-INCH	size 18, 24
DCP-5	16-INCH	size 36, 60

CEILING PANELS (PANEL WITH DUCT CONNECTOR)

CKP-12	2 X 2 CEILING PANEL, FOR 12-INCH DUCT	
CKP-16	2 X 2 CEILING PANEL, FOR 16-INCH DUCT	

DUCT FLANGE

DF-12	12-INCH DUCT FLANGE	size 12, 18, 24
DF-16	16-INCH DUCT FLANGE	size 36, 60

(Size 36 and 60 come with 16" duct flange)

