



TECHNICAL SPECIFICATIONS

VOLTAGE	PART NUMBER	GRAINGER ITEM #
110V	PB10-A-06-B	44ZC70

SIDE VIEW - MOUNTED

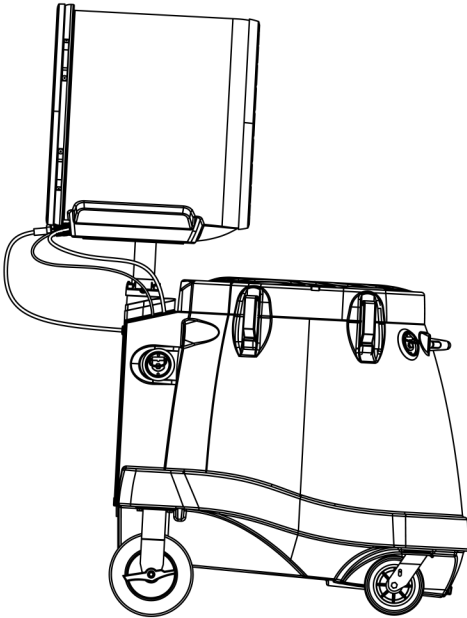

FRONT VIEW - STORED

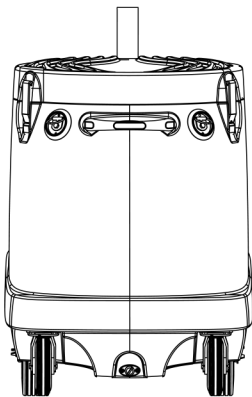

Cooling Ability	Up to 27°F (15°C)
Area of Coverage (Optimal)	Up to 3,000 sq. ft. (279m ²)
Effective Distance	Up to 80 feet (24 Meters)
Oscillation	Yes
Integrated Water Container	Yes - 100 gallon (378L). Hose connection not required.
Operating Time	4-5 days running 10-12 hrs/days
Effective Water Vaporization	0.1-2 Gallons/Hour (0.4L-7.6L/Hour)
Electric Consumption	Avg. 5 Amps (110V Unit); Avg. 9 Amps (220V Unit)
Air Flow	14,000 CFM (23,786 m ³ /hr)
Height	46" (116.8cm) stored, 70" (177.8cm) when mounted
Width	29.5" (75cm)
Depth	42" (107cm) stored, 51.5" (130.8cm) when mounted
Weight (without water)	220 lbs (99.8kg)
Power Source	110V or 220V (Type G Plug)
Nozzles	None. No calcification/clogging.
Technology	Unique atomization technology
Highly durable castors	10" (25.4cm) and 8" (20cm) rugged castors
Hard case for shipping and transport	Yes - Integrated into design
Pads used in Swamp Cooler?	Not a swamp cooler. No pads needed. No replacement pads ever necessary.
Certifications	OSHA Compliant, ETL Certified, NOM Certified, CE Compliant (220V unit)
Warranty	2 Years

